# Central hanger for cable tray, side height 60

Central suspension for cable trays with rolled side rail of side height 60 mm.
The central suspension possesses a rotatable M10 threaded sleeve. When filling, ensure an even distribution of the load (avoid one-sided filling).

| Type | For width mm | For threaded rod | Dim. B mm | Dim. b mm | F in kN kN | Pack. pcs | Weight kg/100 pcs. | Item No. |
|---|---|---|---|---|---|---|---|---|
| **MAH 60 100 FS** | 100 | M10 | 94 | 84 | 0,9 | 20 | 18,500 | **6358705** |
| **MAH 60 150 FS** | 150 | M10 | 144 | 134 | 0,65 | 20 | 23,000 | **6358709** |
| **MAH 60 200 FS** | 200 | M10 | 195 | 184 | 0,45 | 20 | 27,600 | **6358713** |
| **MAH 60 300 FS** | 300 | M10 | 295 | 284 | 0,22 | 20 | 36,700 | **6358717** |
| **MAH 60 400 FS** | 400 | M10 | 395 | 384 | – | 20 | 46,000 | **6358720** |
| **MAH 60 100 FT** | 100 | M10 | 94 | 84 | 0,9 | 20 | 18,500 | **6358752** |
| **MAH 60 150 FT** | 150 | M10 | 144 | 134 | 0,65 | 20 | 23,000 | **6358756** |
| **MAH 60 200 FT** | 200 | M10 | 195 | 184 | 0,45 | 20 | 27,600 | **6358760** |
| **MAH 60 300 FT** | 300 | M10 | 295 | 284 | 0,22 | 20 | 36,700 | **6358764** |

**St** Steel

**FS** Strip-galvanised **FT** Hot-dip galvanised
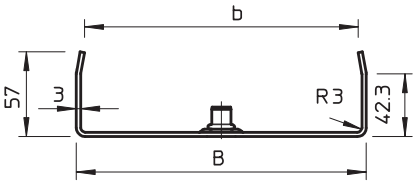
## Dimensions